
Wokingham Borough Council Cross Sections of Consentable Activities



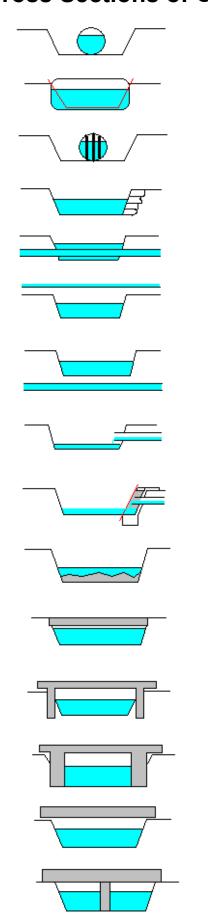

Pipe Culvert (including extension and removal of)-Consent Required under Section 23 1(b & c)

Oversized Box Culvert (including extension and removal of)- Consent Required under Section 23 1(b & c)

Trash Screens - Consent Required as it is an alteration to a culvert and has the potential to obstruct flow

Bank Protection Works - Not Consentable under LDA 91 (temporary works may require consent)

Pipe Crossing (in channel) -Consent Required under Section 23 1(a)

Pipe Crossing (above bank) - Not Consentable under LDA 91 as it does not interfere with flow

Pipe Crossing (below bed) - Not Consentable under LDA 91 as it does not interfere with flow (temporary works may require consent)

Protruding Pipe Outfall - Not Consentable under LDA 91 as it will not act like a dam/weir or like obstruction

Outfall within Bank profile - Not Consentable under LDA 91 as it does not interfere with flow (temporary works may require consent)

Weir/Dam or impoundment or temporary works that obstruct flow - Consent Required under Section23 1(a)

Bridge (where soffit level is below bank top level) - Consent Required under Section 23 1(a) if it has the potential to affect flow

Bridge (abutments protruding but not reducing flow area/width) - Not Consentable under LDA 91 as does not interfere with flow

Bridge (Abutments restricting flow) or Flume - Consent Required under Section 23 1(a)

Clear span bridge - Not Consentable as it does not interfere with flow

Bridge with support in channel - Not Consentable under LDA 91 as it will not act like a dam/weir or like obstruction. Need to consider size of pier against size of watercourse, but would want to discourage the use of a pier in the watercourse

Note: "flow" should be determined as bank full flow conditions